

Model Name	TT-6518RS	TT-7518RS	TT-8618RS	TT-9818RS
Active Screen Size	65"	75"	86"	98"
Backlight	LED			
Display Area	1432 × 807mm	1652 × 930mm	1893 × 1069mm	2162 × 1217mm
Display Ratio	16:9			
Resolution	3840 × 2160 Pixels			
Display Colors	8-bit	8-bit	10-bit	10-bit
Brightness	≥ 320nit			
Contrast	4000:1	4000:1	1200:1	1300:1
Response Time	8ms			
Viewing Angle	178°			
Life Time	≥ 30,000 hours			
Power Consumption	Maximum ≤250W Standby Mode ≤0.5W	Maximum ≤400W Standby Mode ≤0.5W	Maximum ≤450W Standby Mode ≤0.5W	Maximum ≤700W Standby Mode ≤0.5W
Working Voltage	AC 100-240V, 50/60Hz			
Touch Surface	Anti-Glare Glass			
Transparency	>88%			
Haze	2%~5%			
Surface Hardness	7H			
Touch Technology	Infrared Touch			
Touch Points	20 Points in Windows/ 10 Points in Android			
Writing Tools	Nano Pen/ Finger/ Palm			
Positioning Accuracy	±2mm	±2mm	±2mm	±3mm
Communication Interface	USB-A			
Speaker Position	Forward			
Rated Impedance	8Ω			
Freq. Response	180 - 20K Hz	180 - 20K Hz	180 - 20K Hz	90(±20%) - 20K Hz
Max. Power Output	15W × 2	15W × 2	15W × 2	18W × 2
Storage Temperature/ Humidity	-15°C - 55°C/ 20 - 90% RH			
Working Temperature/ Humidity	0°C - 40°C/ 20 - 80% RH			
Mounting (Optional)	Wall-Mounted/ Floor Stand			
Outline Dimension	1546 × 944 × 96mm	1770 × 1071 × 109mm	2019 × 1212 × 109mm	2256 × 1361 × 105mm
Packing Dimension	1695 × 1075 × 275mm	1920 × 1195 × 275mm	2170 × 1345 × 275mm	2460 × 400 × 1625mm
Net Weight	US 44kg EU 44kg	US 56kg EU 56kg	US 73kg EU 73kg	US 133kg EU 133kg
Gross Weight	US 57±2kg EU 57±2kg	US 71±2kg EU 71±2kg	US 91±2kg EU 91±2kg	US 233±2kg EU 233±2kg
VESA Mount Installation Position	600 × 400mm	800 × 400mm	800 × 400mm	800 × 400mm
Intelligent Thermal-Protector	Yes			
OPS PC	Available			
WIFI Dongle	Available			
Trucast Express (Screen Sharing)	Available			
Ports				
Front Interface Inputs	HDMI 1.4 × 1, USB(Touch) × 1, USB(Dynamic) × 2, MIC × 1			
Rear AV Inputs	HDMI 2.0(4K@60Hz) × 2, DP 1.2(4K@60Hz) × 1, VGA(1920x1080@60Hz) × 1, PC Audio × 1, USB(Touch) × 4			
AV Outputs	HDMI Out (Support 4K@60Hz) × 1			
Other	USB2.0(Dynamic) × 1, USB3.0(Dynamic) × 1, USB 2.0 Embedded × 1, RS232 × 1, RJ45 × 2, OPS Slots(4K@60Hz) × 1, DC 5V-2A Out, Line Out × 1, SPDIF Out × 1			

* All specifications are subject to change without further notice.

Newline Interactive Inc.
101 East Park Blvd. Suite 807
Plano, TX 75074, USA
TEL: +1 888 233 0868

Want to buy:
info@newline-interactive.com
Become our partner:
partner@newline-interactive.com

Europe office
Ronda de Poniente, N'2,
1ª planta, Oficina 1B, 28760,
Tres Cantos, Madrid, Spain
TEL: +34 911169178

Want to buy:
info_eu@newline-interactive.com
Become our partner:
partner_eu@newline-interactive.com

Asia Pacific Office
4F-3, No.76 Sec.2, Jiafeng S. Rd,
Zhubei City, Hsinchu Country,
30272, Taiwan
TEL: +886 35504768

Want to buy:
info_ap@newline-interactive.com
Become our partner:
partner_ap@newline-interactive.com

India office
Room No. 203, No. 37,
TTK Road, Alwarpet, Chennai,
Tamil Nadu, India, 600018
TEL: +91 4446945513

Want to buy:
info.in@newline-interactive.com
Become our partner:
partner.in@newline-interactive.com

TRU TOUCH *RS Series*



Redefine Smarter Collaboration

Let the versatile 4K UHD interactive display bring more collaboration and student engagement to your classroom. Turn the display into digital whiteboard, share files in one touch, and use your favorite software all with your fingers and the press of a button. TRU TOUCH RS works in your world and lets you interact your way.

Dual user experience
for education and corporate users.

Up to 20 points
of touch so multiple people can write and share ideas.

Customizable UI
lets you be more productive, faster.

INTERACTION MADE EASY.


- Stunning 4K UHD resolution redefines clarity
- Slim frame, light weight for easy installation
- Windows system and built-in OS support
- Embedded tools and apps
- Reduce clutter and bring efficiency for the faculty
- Comes in 65", 75", 86", and 98"



Intuitive collaboration for classroom



Bring your own device and share files

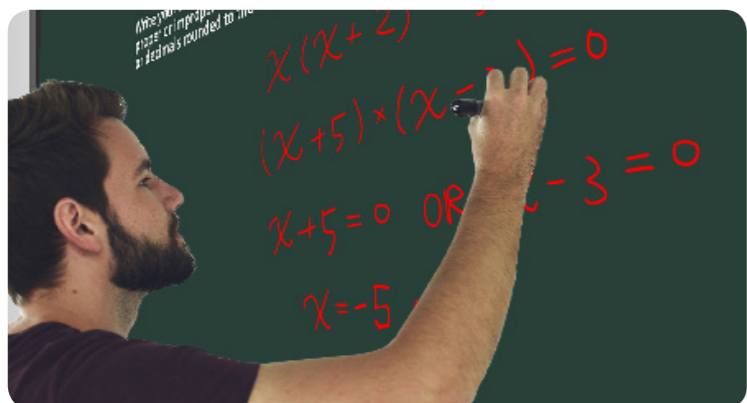

Intelligent Touch



The whiteboard supports object recognition that can differentiate your finger, stylus and palm, and react as marker, thin pen, or eraser.

Responsive 20 Points

The RS series supports up to 20 points of touch, allowing multiple users to interact at the same time with lag-free experience.

65" 75" 86" 98"



Dual Theme Selection

Let you easily change the screen theme and personalize the wallpaper and user interface on your built-in operating system.

TRUCAST EXPRESS

Personalized User Interface

You can add up to 5 of your most frequently-used apps, input sources, external devices or file folders as shortcuts here.

TRUCAST Express App

The built-in wireless casting app lets you connect your own device without hassle. TRUCAST Express supports Airplay, Google Cast, and MirrorOp. Up to 4 devices can be display on the screen at once.

Diverse Connectivity

Connect with a variety of I/O ports, including 3 HDMI ports, a DisplayPort, and a VGA port.