

newline







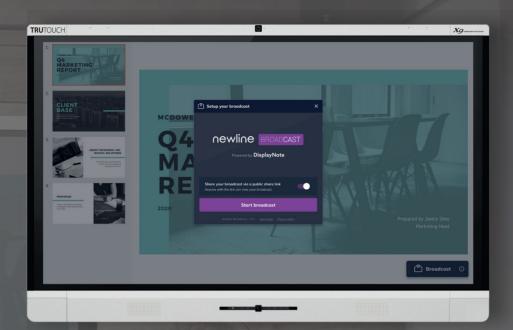





Compatibility





Collaboration

THE UNMATCHED ALL-IN-ONE UNIFIED **COLLABORATION SOLUTION**

The X Series features an all-in-one solution for collaboration that is immersive, unified and effective. X Series is designed to make your meetings more efficient. The two built-in 1080p wide-angle cameras let you be seen from anywhere in the room. The microphone array reduces noise and cancels echo. Your voice can be heard clearly. Advanced InGlass touch enables responsive touch for a smooth and intuitive writing experience as natural as writing on paper. Optical bonding gives you an ultra-wide 178° viewing angle. No matter where you sit in the room, the image is robust and clear.

X Series allows you to meet, conference and collaborate without limitations. Share voice, video, data and annotations. Work on documents simultaneously with people on a conference call as if you were in the same room. With the instant digital discussion board and on-screen annotation tool, you'll never let another idea slip away.

Newline X series features the following optional interactive ecosystem tools:

BROADCAST **DISPLAY MANAGEMENT**

LAUNCH**CONTROL**



Model	Х6	X8	Х9
		<u> </u>	
Backlight		LED	
Display Area	1431 × 806 mm	1662 × 942 mm	1897 × 1068 mm
Active Screen Size	65"	75"	86"
Display Ratio	00	16:9	
Resolution		3840 × 2160 Pixels	
	0.1.3		10 1.4
Display Color Depth	8-bit	8-bit	10-bit
Brightness		370 nit	
Contrast Ratio	4000:1	4000:1	1200:1
Response Time		8 ms	
Viewing Angle		178°	
Life Time		≥ 30,000 hours	
		Speaker	
Speaker Position		Front	
Rated Impedance	8Ω		
Frequency Response	80 - 18K Hz		
Output SPL	88 ± 3 dB		
Max. Power Output		15 W × 2	
Max. I owel output		Microphone	
O an athliate.		· · · · · · · · · · · · · · · · · · ·	
Sensitivity		-38 ± 3 dB	
Frequency Response		62 - 12.5K Hz	
Polar Patterns	Omnidirectional		
THD +N (1K Hz @ +4dBu)		0.25% at 104 dB SPL	
Quantity	4		
		Camera	
Position	Top \times 1, Bottom \times 1 (Only one can be used at a time)		
Sensor	2M Pixels		
Lens	72°		
Video Resolution	1920 × 1080 @30fps (Max)		
Video Resolution		Power	
	Maximum ≤ 250 W	Maximum ≤ 400 W	Maximum ≤ 450 W
Power Consumption	Standby Mode ≤ 0.5 W	Standby Mode ≤ 0.5 W	Standby Mode ≤ 0.5 W
Working Voltage	,	AC 100-240 V, 50/60 Hz	,
		Touch	
Touch Surface	Optical Bonding Anti-Glare & Anti-Fingerprint Glass		
	Optical Bonding Anti-Glare & Anti-Fingerprint Glass 80% - 90%		
Transparency			
Haze		≤ 5%	
Surface Hardness		7H	
Touch Technology	InGlass		
HID Support	HID		
Touch Points		20 Points in Windows/ 10 Points in Android	d
Writing Tools		Passive Pen/ Finger/ Palm	
Touch Resolution	22855 × 12856	26394 × 14847	30320 × 17055
Scan Speed		150 Hz	
Positioning Accuracy		±1.0 mm	
Communication Interface		USB-A	
Communication Interface		Environmental/ Physical Specifications	
Observed Transport (11 12)			
Storage Temperature/ Humidity	-15°C - 55°C/ 20 - 90%RH		
Working Temperature/ Humidity		0°C - 40°C/ 20 - 80%RH	
Mounting (Optional)		Wall Mount/ Floor Stand	
Outline Dimensions	1569 × 1045 × 89 mm	1792 × 1169 × 103 mm	2039 × 1315 × 103 mm
Packing Dimensions	1725 × 275 × 1170 mm	1918 × 275 × 1295 mm	2155 × 310 × 1400 mm
	US 45 kg	US 58 kg	US 71 kg
Net Weight	EU 45 kg	EU 58 kg	EU 71 kg
Gross Weight	US 57.5 ± 2 kg	US 72 ± 2 kg	US 93 ± 2 kg
GIUSS WEIGHT	EU 57.5 ± 2 kg	EU 72 ± 2 kg	EU 93 ± 2 kg
		Connectivity	
Front Interface Inputs	HDMI 1.4 × 1, USB(Touch) × 1, USB(Dynamic) × 2, MIC × 1		
AV Inputs	HDMI 2.0 × 2, HDMI 1.4 × 1, DP 1.2 × 1, USB(Touch) × 4		
AV Outputs	HDMI Out (Support 4K@60Hz) × 1, Line Out × 1, SPDIF Out × 1		
	USB 2.0(Dynamic) × 1, USB 2.0 Embedded × 1, RS232 × 1, RJ45 × 2, USB 3.0(Dynamic) × 1, OPS Slot(4K@60Hz) × 1,		
Other	05B 2.0(bynamic) × 1, 05B 2.0 Embedded × 1, R5232 × 1, R345 × 2, 05B 3.0(bynamic) × 1, 0P5 5101(4R(@60Hz) × 1, DC 5V-2A Out × 1		
		Other Features	
Intelligent Thermo-Protector		Yes	
Built-In Wi-Fi		2.4G/ 5G	



NEWLINE INTERACTIVE INC.

Suite 807 Plano, TX 75074, USA TEL: +1 888 233 0868

101 East Park Blvd.

ASIA PACIFIC OFFICE

17F, No. 653, Bannan Rd, Zhonghe Dist, New Taipei City 235, Taiwan TEL: +886 2 8228 2089

EUROPE OFFICE

Ronda de Poniente, N'2, 1st floor, Oficina 1B, 28760, Tres Cantos, Madrid, Spain TEL: +34 911169178

INDIA OFFICE

Room No. 203, No. 37, TTK Road, Alwarpet, Chennai, Tamil Nadu, India, 600018 TEL: 1 800 419 0309

newline-interactive.com