




newline *ip*

AN OUTSTANDING INTERACTIVE DISPLAY DESIGNED FOR ENTERPRISE SECURITY

The IP Series is a Linux-based interactive display for secure and intuitive collaboration. Immerse yourself in the outstanding interactivity of an optically bonded 4K display with P-cap touch technology and intelligent Object Recognition. With stronger network security, connect your team to the world without comprising sensitive information.



Optical Bonding




Security



Capacitive Touch

newline *ip*

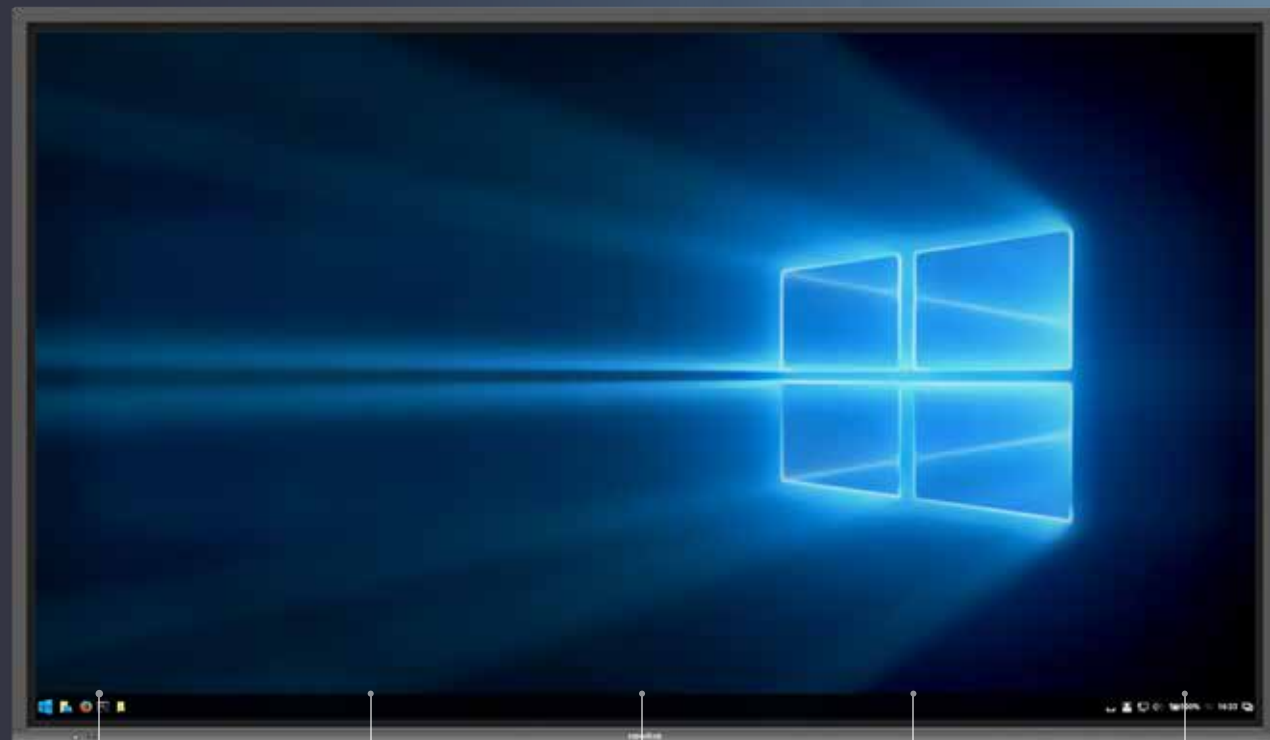

4K

Superior Image Quality with 4K UHD resolution



Optical Bonding reduces reflection and parallax.



Intuitive writing with intelligent Object Recognition



Blue Light Filter for a safe viewing experience




Capacitive touch for the smoothest interactive experience



CAST

Compatible with Newline Cast for wireless casting. Present and share content seamlessly from any device and OS with a single click.

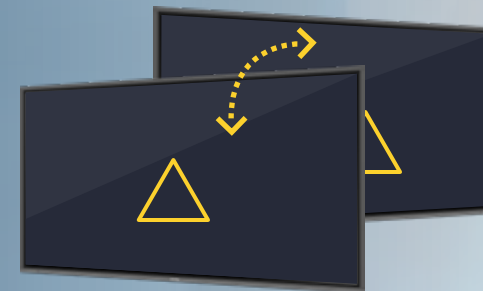

WORKSPACE

Pull up your meetings by walking up to the display with Newline Launch Control and co-edit documents in real-time with video-chat with Newline Workspace.



WINDOWS

Use the familiar Windows system and all its functionalities on the on-board OPS PC for unlimited and personalized collaboration.



WHITEBOARDING

Take notes comfortably and intuitively on any digital whiteboard for brainstorming and collaborative sessions with intelligent Object Recognition.

SPECIFICATIONS

Display			
Backlight	LED		
Display Area	1428 × 804 mm	1650 × 928 mm	1895 × 1066 mm
Active Screen Size	65"	75"	86"
Display Ratio	16:9		
Resolution	3840 × 2160 Pixels		
Display Color Depth	8-bit	8-bit	10-bit
Brightness	≥ 400 nit		
Contrast Ratio	4000:1		
Viewing Angle	178°		
Life Time	≥ 50,000 hours		
Speaker			
Speaker Position	Downward		
Max. Power Output	15 W × 2		
Electrical			
Power Consumption	Maximum ≤ 300 W Standby Mode ≤ 0.5 W	Maximum ≤ 400 W Standby Mode ≤ 0.5 W	Maximum ≤ 450 W Standby Mode ≤ 0.5 W
Working Voltage	AC 100-240 V, 50/60 Hz		
Touch			
Touch Surface	Optical Bonding Tempered Anti-Glare Glass		
Transparency	88% ± 3		
Surface Hardness	7H		
Touch Technology	P-Capacitive Touch		
Touch Points	20 Points		
Touch Resolution	32767 × 32767		
Transportation/ Storage			
Storage Temperature/ Humidity	-20°C - 60°C/ 20 - 80% RH		
Working Temperature/ Humidity	0°C - 40°C/ 20 - 80% RH		
Mounting (Optional)	Wall Mount/ Floor Stand		
Outline Dimensions	1509 × 865 × 86 mm	1731 × 1010 × 86 mm	1977 × 1150 × 86 mm
Packing Dimensions	1640 × 221 × 1036 mm	1859 × 247 × 1136 mm	2119 × 275 × 1281 mm
Net Weight	36 kg	49 kg	60 kg
Gross Weight	46.5 kg	62 kg	76 kg
Other			
Inputs	USB 2.0 × 1, USB(Touch) × 1, HDMI 2.0 × 2, VGA In × 1, RCA × 1, Audio In × 1, YPbPr × 1, MIC In × 1, RS232 × 1, OPS Slot × 1		
Outputs	Earphone Out × 1		
OPS Slot	4K@60Hz/30Hz		
Operating System	Linux		

newline

HEADQUARTERS (TX, USA)
+1 888 233 0868
info@newline-interactive.com

ASIA PACIFIC OFFICE (Taipei, Taiwan)
+886 2 8228 2089
info_ap@newline-interactive.com

EUROPE OFFICE (Madrid, Spain)
+34 911169178
info_eu@newline-interactive.com

INDIA OFFICE (Chennai)
1 800 419 0309
info.in@newline-interactive.com

KOREA OFFICE (Seoul, South Korea)
+82 2 2638 5140
koreainfo@newline-interactive.com