Engaging Presentation



Interactive Learning



Product Specifications

Model Name	TT-7017FB	TT-8017FB
Active Screen Size ("inch)	70"	80"
Display Backlight	LED	
Display Area	1538.88 x 865.6mm	1771.2 x 996.3mm
Display Ratio	16:9	
Resolution	1920 x 1080 Pixel	
Display Colors	10bit	
LCD Brightness	370cd/m2	
Contrast Ratio (Typical)	4000:1	5000:1
Response Time (Typical)	8ms	
Viewing Angle	178°	
Life Time (working hours/day)	Minimum 30,000 hours	
Power Consumption Max.	Maximum <220W	Maximum <250W
Touch Surface Material	Tempered glass	
Touch Surface Technology	Anti-Glare glass	
Transparency	88%	
Touch Sensor	Infrared Touch	
Touch Points	10 Points	
Touch Screen Writing Tools	Nano Pen (>6mm width) included or Finger	
Cursor Speed	125 Points/s	
Positioning Accuracy	1mm	
Communication Interface	USB-B	
Speaker Position	Forward	
Speaker Max.Power Output	15W*2	
Transmission Range	5M	
Android System	5.0.1	
Installation Method (optional)	Wall-mounted / Floor Stand	
Outline Dimension	1658 x 1004 x 99 mm	1900 x 1139x 118.7 mm
Packing Dimension	1816 x 275 x 1118 mm	2035 x 1275 x 275 mm
Net Weight	50 KG	71 KG
Gross Weight	65 KG	92 KG



NEWLINE INTERACTIVE

US Headquarters 101 East Park Blvd. Suite 807 Plano, TX 75074, USA TEL: +1-972-468-9728 http://www.newline-interactive.com/ Want to buy: info@newline-interactive.com
Become our partner: partner@newline-interactive.com

Europe Office Ronda de Poniente, N´2, 1ª planta, Oficina 1B, 28760, Tres Cantos, Madrid, Spain TEL: +34-911169178 Want to buy: info eu@newline-interactive.com

Become our partner: partner_eu@newline-interactive.com

Asia Pacific Office 4F-3, No.76, Sec.2, Jiafeng S.Rd, Zhubei City, Hsinchu County, 30272, Taiwan Tel: +886-3-5504768

Want to buy: info ap@newline-interactive.com Become our partner: partner_ap@newline-interactive.com



TRUTOUCH FB Series





and Erase







Handwriting







Easy of Use



Import Video





HDMI

Product Advanced Features

Connectivity

Share everything by the way you like to use, not only physical cable to input but also wireless solution.













Zero Training Easy Operation

With its simple user interface no training needed to learn TRUTOUCH. Simply following the icon and use TRUTOUCH basic function without any difficulty.





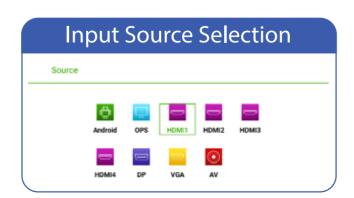

Excellent Resolution



Integrated Sound Bar

Responsive 10 points Touch

TRUTOUCH supports multi-touch to 10 points. Creating the interaction environment for conference room.





Antiglare Glass

← △ □ ≡ E □ □ ■ E ● • Ⅲ

Plug & Play



Support Multiple Input & Output

TRUTOUCH allows users to share information by their own devices. You may find all of the major I/O ports on TRUTOUCH front sides and rear sides as well.

