

Engaging Presentation



Interactive Learning



Product Specifications

| Model Name | TT-6516UB | TT-7516UB | TT-8616UB |
|--------------------------------|--|----------------------|----------------------|
| Active Screen Size ("inch) | 65" | 75" | 86" |
| Display Backlight | LED | | |
| Display Area | 1428.5 x 803.5mm | 1650 x 973mm | 1895 x 1066mm |
| Display Ratio | 16 : 9 | | |
| Resolution | 3840 x 2160 Pixel (4K) | | |
| Display Colors | 10 bit | | |
| LCD Brightness | 370 cd/m2 | | |
| Contrast Ratio (Typical) | 4000:1 | | |
| Response Time (Typical) | 8 ms | | |
| Viewing Angle | 178° | | |
| Life Time (working hours) | Minimum 30,000 hours | | |
| Power Consumption Max. | Maximum <220W | Maximum <350W | Maximum <450W |
| Touch Surface Material | Tempered glass | | |
| Touch Surface Technology | Anti-Glare glass | | |
| Transparency | >88% | | |
| Haze | 2%~5% | | |
| Touch Surface Hardness | >H7 | | |
| Touch Sensor | Infrared Touch | | |
| Touch Points | 10 Points under Windows system | | |
| Touch Screen Writing Tools | Nano Pen (>6mm width) included or Finger | | |
| Cursor Speed | 100 Point/s | | |
| Positioning Accuracy | 5 mm | | |
| Communication Interface | USB-B | | |
| Speaker Position | Forward | | |
| Speaker Max.Power Output | 15W x 2 | | |
| Transmission Range | 5M | | |
| Android System | Version 5.0.1 | | |
| Installation Method (optional) | Wall-mounted / Floor Stand | | |
| Outline Dimension | 1544.03 x 939.1 x 99.1 mm | 1768 x 1066 x 114 mm | 2019 x 1209 x 116 mm |
| Packing Dimension | 1705 x 1080 x 265 mm | 1923 x 1215 x 280 mm | 2150 x 1320 x 310 mm |
| Net Weight | 43 KG | 59 KG | 72 KG |
| Gross Weight | 57 KG | 76 KG | 100 KG |

TRU TOUCH *UB Series*



Easily Write
and Erase



Annotation



Record



Handwriting



Rugged



Easy of Use



Import Video



Android




HDMI



PRODUCT ADVANCED FEATURES

Connectivity

Share everything by the way you like to use, not only physical cable to input but also wireless solution.

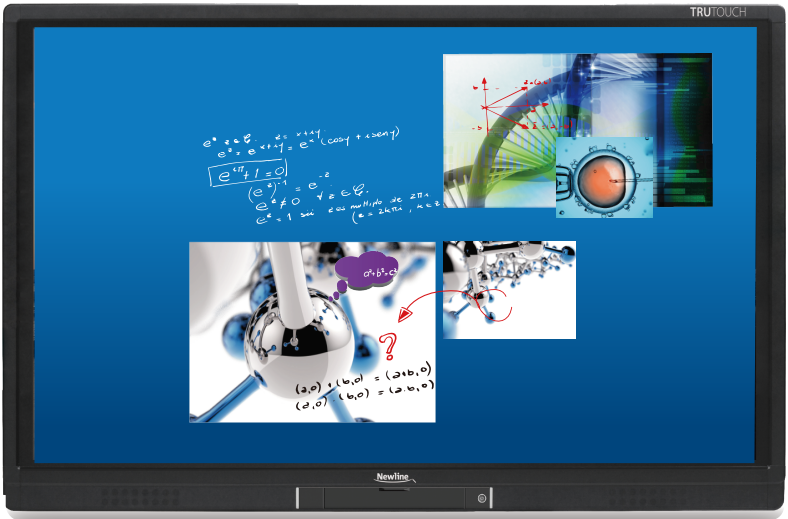

Internal PC

OPS (Optional)

Screen Projection & Touch Control

PC/Mac

Object Projection

Document Camera

Wireless Presentation

TRUCAST (Optional)

Zero Training Easy Operation

With its simple user interface no training needed to learn TRU TOUCH. Simply following the icon and use TRU TOUCH basic function without any difficulty.



Android System Tool Bar

Whiteboard Function Bar

Input Source Selection

Excellent 4K Resolution



Antiglare Glass



Integrated Sound Bar




Plug & Play



Responsive 10 points Touch

TRU TOUCH supports multi-touch to 10 points. Creating the interaction environment for conference room.

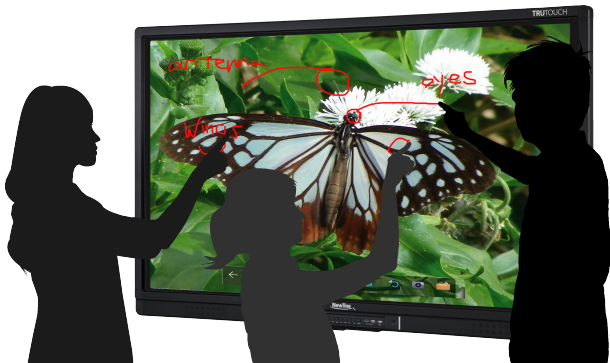

Support Multiple Input & Output

TRU TOUCH allows users to share information by their own devices. You may find all of the major I/O ports on TRU TOUCH front sides and rear sides as well.

| | | | | | |
|-------------------|----------------------------|----------------------|------------------------|----------------------------------|--|
| VGA IN x 1 | HDMI IN x 4 | TOUCH-USB x 4 | Micro SD IN x 1 | USB Android x 2 PC x 2 | AUDIO Audio In (VGA) x1 Audio Out x 1 Earphone x1 |
| MIC IN x 1 | DisplayTouch IN x 1 | RS232 x 1 | LAN x 2 | AV-IN x 1 | |