




newline i

REVOLUTIONIZING THE EDUCATION SECTOR

The most cost efficiency I Series has been designed to transfer the traditional classroom setup to a digital classroom. 4K screen in many sizes brings digital content alive to engage student attention.

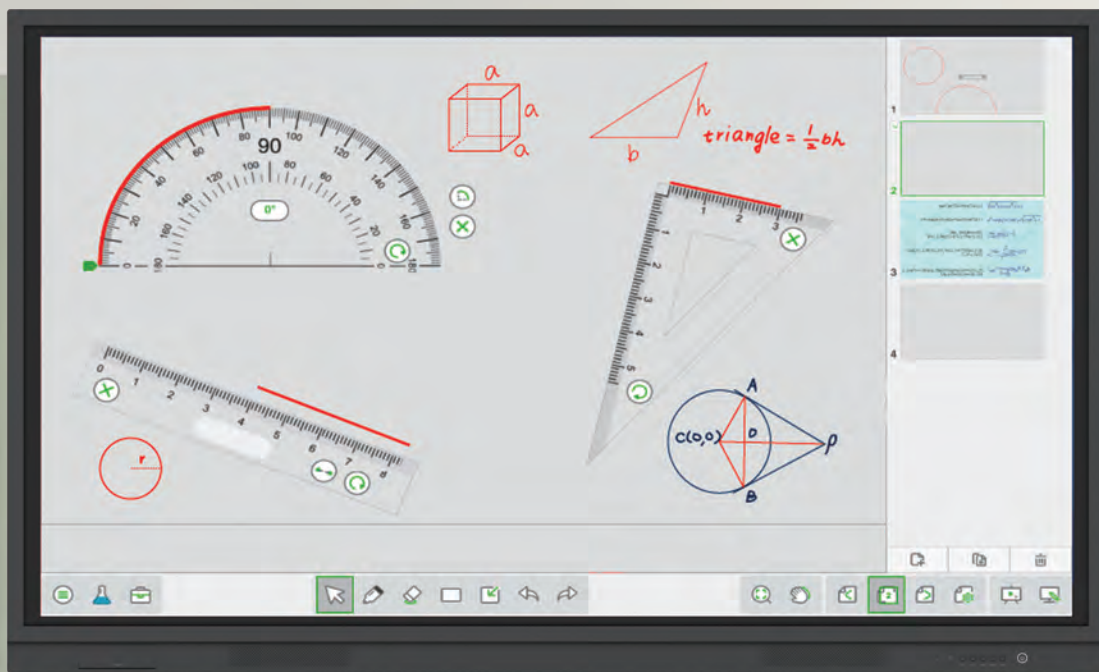

Superior Touch




No Calibration
Required



Plug & Play



Software



Anti-Glare



Affordable

newline *i*

Model	TT-6519I	TT-7519I	TT-8519IS
	Display		
Display Backlight	LED		
Display Area	1428 x 804 mm	1650 x 928 mm	1872 x 1053 mm
Active Screen Size (inch)	65"	75"	85"
Display Ratio	16 : 9		
Resolution	3840 × 2160 Pixels		
Display Colors	8 bit + FRC (1.07 billion)		10 bit + FRC (1.07 billion)
LCD Brightness(After Glass)	≥ 370 nit		≥ 400 nit
Contrast Ratio (Dynamic)	4000:1		
Viewing Angle	178°		
Life time (working hours/day)	50,000 hours		
Response Time	8ms		
	Speaker		
Speaker Position	Front facing		Downward facing
Transmission Range	5M		
Speaker Max.Power Output	15 W × 2		
	Power		
Power Consumption	Maximum ≤ 250 W Standby Mode ≤ 0.5 W	Maximum ≤ 400 W Standby Mode ≤ 0.5 W	Maximum ≤ 450 W Standby Mode ≤ 0.5 W
Working Voltage	AC100-240V Max 3.0A	AC100-240V Max 4.0A	AC100-240V Max 4.5A
	Touch		
Touch Surface Technology	Anti-Glare, tempered glass		
Touch Surface Hardness	>7H		
Touch Sensor	Infrared Touch		
Touch Points	20 Points		
Touch Screen Writing Tools	Stylus, Finger		
Communication Interface	USB-A		
	Transportation/ Storage		
Storage Temperature/ Humidity	-10°C ~ 45°C / 20 ~ 90% RH (non-condensing)		
Working Temperature/ Humidity	0°C ~ 40°C / 20 ~ 80% RH (non-condensing)		
Mounting Options	Wall-mount or Mobile Stand		
Outline Dimensions	1546 × 944 × 96 mm	1770 × 1071 × 101 mm	1982.6 × 1180.5 × 87.1 mm
Packing Dimensions	1670 × 1056 × 221 mm	1895 × 1193 × 247 mm	2170 × 1345 × 275 mm
Net Weight	44 kg	57 kg	69 kg
Gross Weight	58 ± 2 kg	73 ± 2 kg	86 ± 2 kg
Vesa Mount Installation Position	600 × 400 mm	800 × 400 mm	
	Ports		
Front Interface Inputs	USB 3.0 for OPS x 2, HDMI In x 1, Touch USB(Type B) x 1, MIC In x 1		USB 3.0 for OPS x 1 , HDMI In x 1, USB 2.0 for media player x 1, Touch USB(Type B) x 1, MIC In x 1
Rear AV Inputs	HDMI 2.0 in x 2, VGA IN x 1, VGA Audio in x 1, Touch USB(Type B) x 1		
AV Outputs	AV out x 1, Ear Phone x 1		
Other	USB2.0 x 1, RS232 x 1, OPS Slot x 1(4K@60Hz)		
	Embedded Operating System		
CPU	MIPS Advanced Multi-core CPU		
GPU	MStarACE6 Video Processor		
RAM	2GB DDR3 MCP		
ROM	64M bit norflash		
External Memory	None		
Android Version	None		
	Other		
OPS PC	Optional		
Wi-Fi Dongle	N/A		
Newline Software Content	Teach Infinity II (Free download from website. Support Windows, Mac, Linux)		

newline

HEADQUARTERS (TX, USA)

101 East Park Blvd.
Suite 807 Plano,
TX 75074, USA
TEL: +1 888 233 0868
info@newline-interactive.com

APAC OFFICE (Hsinchu, Taiwan)

4F-3, No. 76, Sec. 2, Jiafeng S. Rd.,
Zhubei City, Hsinchu County,
302, Taiwan
TEL: +886 3 550 4768
info_ap@newline-interactive.com

EUROPE OFFICE (Madrid, Spain)

Ronda de Poniente, N'2, 1st floor,
Oficina 1B, 28760,
Tres Cantos, Madrid, Spain
TEL: +34 911 169178
info_eu@newline-interactive.com

INDIA OFFICE (Chennai)

Room No. 203, No. 37, TTK Road,
Alwarpet, Chennai,
Tamil Nadu, India, 600018
TEL: 1 800 419 0309
info.in@newline-interactive.com

KOREA OFFICE (Seoul, South Korea)

A816, 8F, 401 Yangcheon-ro,
Gangseo-gu, Seoul,
07528 Korea
TEL: +82 2 2638 5140
koreainfo@newline-interactive.com

newline-interactive.com

2019 Newline Interactive Inc. Specification may vary by region, please contact our local offices for details. Actual product features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.