




newline *ip*

## UNMATCHED POWERFUL PCAP WITH ENTERPRISE LEVEL SECURITY

Immerse yourself in outstanding interactivity collaboration for any workspace, from huddle room to large meeting room.



Optical Bonding



Security



Capacitive Touch

# newline *ip*



Superior Touch




Object Recognition



Ultra Lightweight



Superior Image Quality

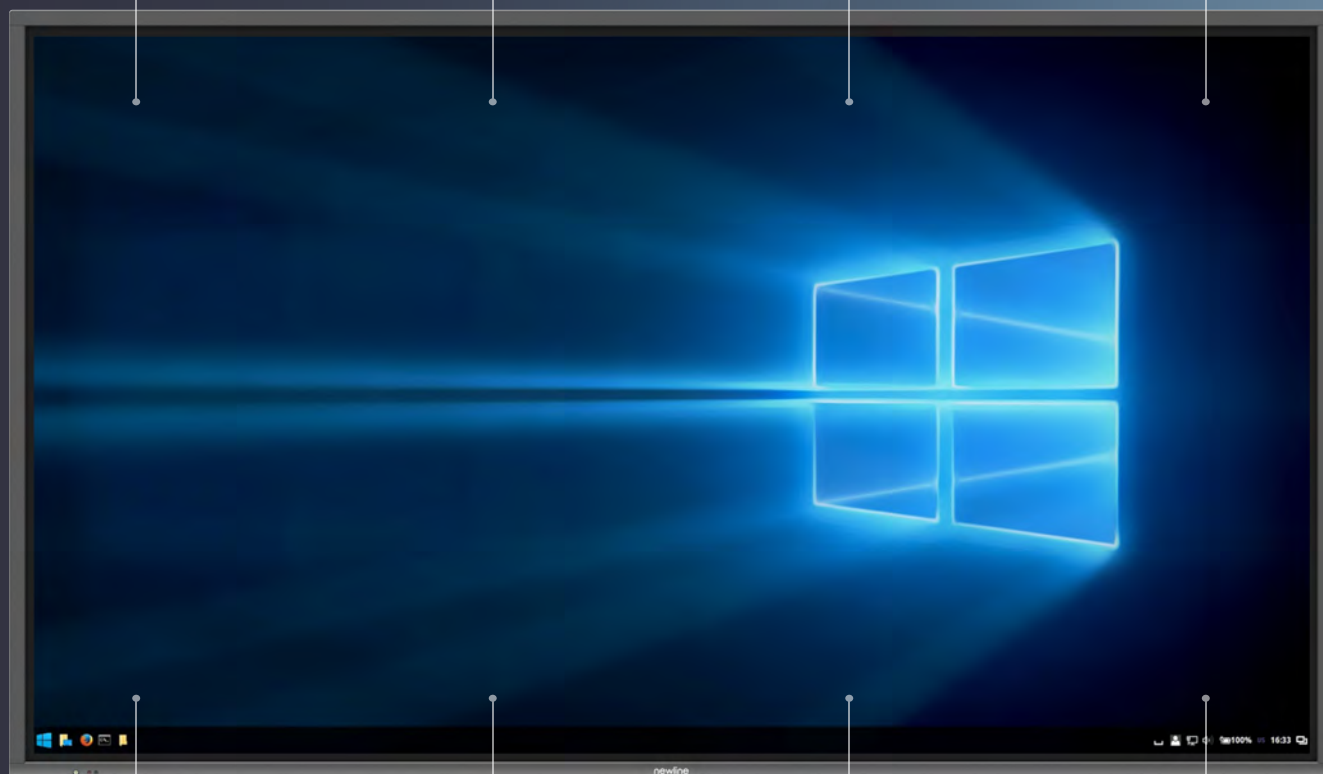

Security



Maximum Viewing Angle



Optically Bonded  
PCAP



Easy Installation



## CAST WIRELESS SCREEN SHARING

Easily share your screen from any device. Newline Cast is simple to use, with one click you can present wirelessly from any network. Control and annotate from the Newline display or from your own device all with the freedom to walk around the room.

## BROADCAST

### CONTENT SHARING TO A LARGE GROUP OF ATTENDEES

Tap one button and share your display screen with the attendees who may not be able to see the display as clearly. They can follow along with the meeting on their own personal screen, reducing eye strain, and making sure everyone gets the most out of the the daily task.



## WINDOWS

Use the familiar Windows system and all its functionalities on the onboard OPS PC for unlimited and personalized collaboration.



## WHITEBOARDING

Take notes comfortably and intuitively on Windows digital whiteboard for brainstorming and collaborative sessions with intelligent Object Recognition.



# SPECIFICATIONS

Model	TT-5519IP	TT-6519IP	TT-7519IP	TT-8619IP
	Display			
Display Backlight	LED			
Display Area	1211 x 682 mm	1428 x 804 mm	1650 x 928 mm	1895 x 1066 mm
Active Screen Size (inch)	55"	65"	75"	86"
Display Ratio	16 : 9			
Resolution	3840 × 2160 Pixels			
Display Colors	8 bit + FRC (1.07 billion)	8 bit + FRC (1.07 billion)	8 bit + FRC (1.07 billion)	10bit 1.07Billion
LCD Brightness(After Glass)	≥ 370 nit			
Contrast Ratio (Dynamic)	4000:1			
Viewing Angle	178°			
Life time (working hours/day)	50,000 hours			
Response Time	8ms			
	Speaker			
Speaker Position	Downward facing			
Transmission Range	5M			
Speaker Max.Power Output	15 W × 2			
	Power			
Power Consumption	Maximum ≤350 W Standby Mode ≤ 0.5 W	Maximum ≤350 W Standby Mode ≤ 0.5 W	Maximum ≤ 400 W Standby Mode ≤ 0.5 W	Maximum ≤ 450 W Standby Mode ≤ 0.5 W
Working Voltage	AC100-240V ; 50/60 Hz			
	Touch			
Touch Surface Technology	Anti-Glare, tempered glass with Optical bonding			
Touch Surface Hardness	>7H			
Touch Sensor	PCAP			
Touch Points	20 Points			
Touch Screen Writing Tools	Newline passive pen or finger			
Communication Interface	USB-B			
	Transportation/ Storage			
Storage Temperature/ Humidity	-10°C~45°C/20~90% RH (No condensation)		-20°C ~ 60°C / 20 ~ 90% RH (No condensation)	
Working Temperature/ Humidity	0°C~40°C/20~80% RH (No condensation)		0°C ~ 45°C / 20 ~ 80% RH (No condensation)	
Mounting Options	Wall-mount or Mobile Stand			
Outline Dimensions	1290 x 764 x 73 mm	1509 × 866 × 86 mm	1731 × 1010 × 86 mm	1977 × 1150 × 86 mm
Packing Dimensions	1417 x 871 x 221 mm	1640 × 1036 × 221 mm	1859 × 1136 × 247 mm	2119 × 1281 × 275 mm
Net Weight	28kg	36kg	49kg	60kg
Gross Weight	36kg	46.5kg	62kg	76kg
Vesa Mount Installation Position	400 × 400 mm	600 × 400 mm	800 × 400 mm	800 × 400 mm
	Ports			
Front Interface Inputs	None			
Rear AV Inputs	HDMI 2.0 in x 2, VGA IN x 1, VGA Audio in x 1,, YPbPr in x 1, CVBS in x 1, AV (L&R) in x 1			
AV Outputs	AV out x 1, Ear Phone x 1			
Other	USB2.0 x 1, Touch USB (Type B) x 1, RS232 x1, OPS Slot x1(4K@60Hz)			
	Embedded Operating System			
CPU	MIPS Advanced Multi-core CPU			
GPU	MStarACE6 Video Processor			
RAM	2GB DDR4 MCP			
ROM	64MB norflash			
External Memory	None			
Android Version	None			
	Other			
OPS PC	Optional			
Wi-Fi Dongle	N/A			
Newline Software Content	Newline Cast & Broadcast (Support Windows)			

## newline

**HEADQUARTERS (TX, USA)**  
101 East Park Blvd.  
Suite 807 Plano,  
TX 75074, USA  
TEL: +1 888 233 0868  
info@newline-interactive.com

**ASIA PACIFIC OFFICE (Taipei, Taiwan)**  
6F-3, No. 8, Taiyuan 2nd St.,  
Zhubei City, Hsinchu County  
302082 , Taiwan  
TEL: +886 2 8228 2089  
info\_ap@newline-interactive.com

**EUROPE OFFICE (Madrid, Spain)**  
Ronda de Poniente, N'2, 1st floor,  
Oficina 1B, 28760,  
Tres Cantos, Madrid, Spain  
TEL: +34 911169178  
info\_eu@newline-interactive.com

**INDIA OFFICE (Chennai)**  
Room No. 203, No. 37, TTK Road,  
Alwarpet, Chennai,  
Tamil Nadu, India, 600018  
TEL: 1 800 419 0309  
info.in@newline-interactive.com

**KOREA OFFICE (Seoul, South Korea)**  
A816, 8F, 401 Yangcheon-ro,  
Gangseo-gu, Seoul,  
07528 Korea  
TEL: +82 2 2638 5140  
koreainfo@newline-interactive.com

newline-interactive.com

2019 Newline Interactive Inc. Specification may vary by region, please contact our local offices for details. Actual product features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.