




# newline i

## REVOLUTIONIZING THE EDUCATION SECTOR

The most cost efficiency I Series has been designed to transfer the traditional classroom setup to a digital classroom. 4K screen in many sizes brings digital content alive to engage student attention.

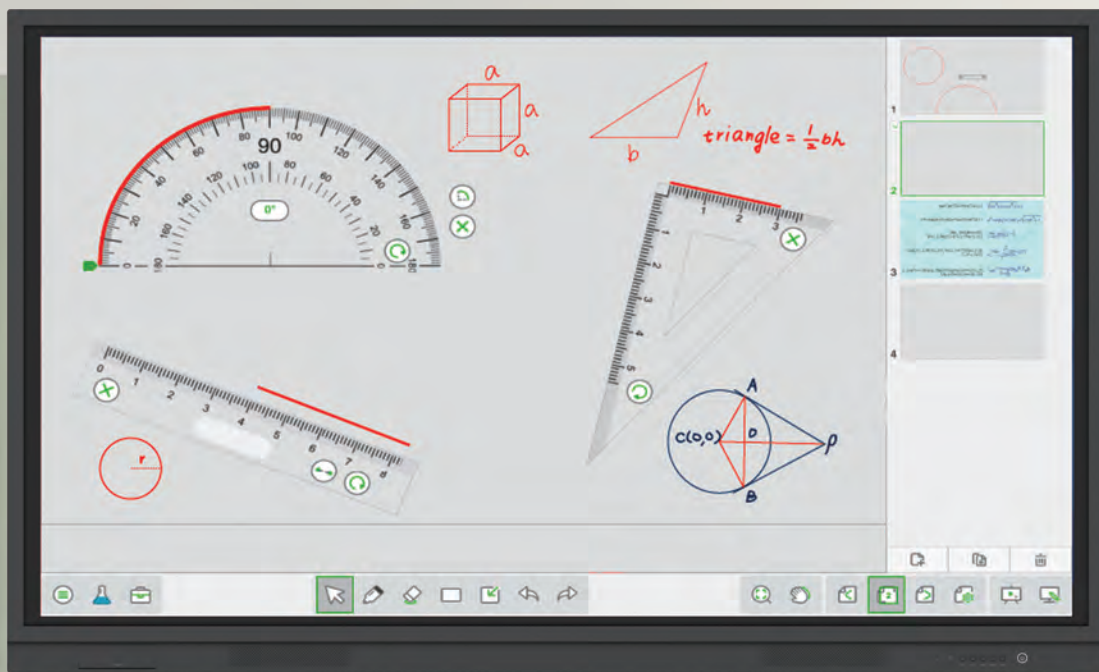

Superior Touch




No Calibration  
Required



Plug & Play



Software



Anti-Glare



Affordable

# newline *i*

| Model                            | TT-6519I                                                                    | TT-7519I                                | TT-8519IS                                                                                          |
|----------------------------------|-----------------------------------------------------------------------------|-----------------------------------------|----------------------------------------------------------------------------------------------------|
|                                  | Display                                                                     |                                         |                                                                                                    |
| Display Backlight                | LED                                                                         |                                         |                                                                                                    |
| Display Area                     | 1428 x 804 mm                                                               | 1650 x 928 mm                           | 1872 x 1053 mm                                                                                     |
| Active Screen Size (inch)        | 65"                                                                         | 75"                                     | 85"                                                                                                |
| Display Ratio                    | 16 : 9                                                                      |                                         |                                                                                                    |
| Resolution                       | 3840 × 2160 Pixels                                                          |                                         |                                                                                                    |
| Display Colors                   | 8 bit + FRC (1.07 billion)                                                  |                                         | 10 bit + FRC (1.07 billion)                                                                        |
| LCD Brightness(After Glass)      | ≥ 370 nit                                                                   |                                         | ≥ 400 nit                                                                                          |
| Contrast Ratio (Dynamic)         | 4000:1                                                                      |                                         |                                                                                                    |
| Viewing Angle                    | 178°                                                                        |                                         |                                                                                                    |
| Life time (working hours/day)    | 50,000 hours                                                                |                                         |                                                                                                    |
| Response Time                    | 8ms                                                                         |                                         |                                                                                                    |
|                                  | Speaker                                                                     |                                         |                                                                                                    |
| Speaker Position                 | Front facing                                                                |                                         | Downward facing                                                                                    |
| Transmission Range               | 5M                                                                          |                                         |                                                                                                    |
| Speaker Max.Power Output         | 15 W × 2                                                                    |                                         |                                                                                                    |
|                                  | Power                                                                       |                                         |                                                                                                    |
| Power Consumption                | Maximum ≤ 250 W<br>Standby Mode ≤ 0.5 W                                     | Maximum ≤ 400 W<br>Standby Mode ≤ 0.5 W | Maximum ≤ 450 W<br>Standby Mode ≤ 0.5 W                                                            |
| Working Voltage                  | AC100-240V Max 3.0A                                                         | AC100-240V Max 4.0A                     | AC100-240V Max 4.5A                                                                                |
|                                  | Touch                                                                       |                                         |                                                                                                    |
| Touch Surface Technology         | Anti-Glare, tempered glass                                                  |                                         |                                                                                                    |
| Touch Surface Hardness           | >7H                                                                         |                                         |                                                                                                    |
| Touch Sensor                     | Infrared Touch                                                              |                                         |                                                                                                    |
| Touch Points                     | 20 Points                                                                   |                                         |                                                                                                    |
| Touch Screen Writing Tools       | Stylus, Finger                                                              |                                         |                                                                                                    |
| Communication Interface          | USB-A                                                                       |                                         |                                                                                                    |
|                                  | Transportation/ Storage                                                     |                                         |                                                                                                    |
| Storage Temperature/ Humidity    | -10°C ~ 45°C / 20 ~ 90% RH (non-condensing)                                 |                                         |                                                                                                    |
| Working Temperature/ Humidity    | 0°C ~ 40°C / 20 ~ 80% RH (non-condensing)                                   |                                         |                                                                                                    |
| Mounting Options                 | Wall-mount or Mobile Stand                                                  |                                         |                                                                                                    |
| Outline Dimensions               | 1546 × 944 × 96 mm                                                          | 1770 × 1071 × 101 mm                    | 1982.6 × 1180.5 × 87.1 mm                                                                          |
| Packing Dimensions               | 1670 × 1056 × 221 mm                                                        | 1895 × 1193 × 247 mm                    | 2170 × 1345 × 275 mm                                                                               |
| Net Weight                       | 44 kg                                                                       | 57 kg                                   | 69 kg                                                                                              |
| Gross Weight                     | 58 ± 2 kg                                                                   | 73 ± 2 kg                               | 86 ± 2 kg                                                                                          |
| Vesa Mount Installation Position | 600 × 400 mm                                                                | 800 × 400 mm                            |                                                                                                    |
|                                  | Ports                                                                       |                                         |                                                                                                    |
| Front Interface Inputs           | USB 3.0 for OPS x 2, HDMI In x 1, Touch USB(Type B) x 1, MIC In x 1         |                                         | USB 3.0 for OPS x 1 , HDMI In x 1, USB 2.0 for media player x 1, Touch USB(Type B) x 1, MIC In x 1 |
| Rear AV Inputs                   | HDMI 2.0 in x 2, VGA IN x 1, VGA Audio in x 1, Touch USB(Type B) x 1        |                                         |                                                                                                    |
| AV Outputs                       | AV out x 1, Ear Phone x 1                                                   |                                         |                                                                                                    |
| Other                            | USB2.0 x 1, RS232 x 1, OPS Slot x 1(4K@60Hz)                                |                                         |                                                                                                    |
|                                  | Embedded Operating System                                                   |                                         |                                                                                                    |
| CPU                              | MIPS Advanced Multi-core CPU                                                |                                         |                                                                                                    |
| GPU                              | MStarACE6 Video Processor                                                   |                                         |                                                                                                    |
| RAM                              | 2GB DDR3 MCP                                                                |                                         |                                                                                                    |
| ROM                              | 64M bit norflash                                                            |                                         |                                                                                                    |
| External Memory                  | None                                                                        |                                         |                                                                                                    |
| Android Version                  | None                                                                        |                                         |                                                                                                    |
|                                  | Other                                                                       |                                         |                                                                                                    |
| OPS PC                           | Optional                                                                    |                                         |                                                                                                    |
| Wi-Fi Dongle                     | N/A                                                                         |                                         |                                                                                                    |
| Newline Software Content         | Teach Infinity II (Free download from website. Support Windows, Mac, Linux) |                                         |                                                                                                    |

## newline

### HEADQUARTERS (TX, USA)

101 East Park Blvd.  
Suite 807 Plano,  
TX 75074, USA  
TEL: +1 888 233 0868  
info@newline-interactive.com

### APAC OFFICE (Hsinchu, Taiwan)

6F-3, No. 8, Taiyuan 2nd St.,  
Zhubei City, Hsinchu County  
302082, Taiwan  
TEL: +886 3 550 4768  
info\_ap@newline-interactive.com

### EUROPE OFFICE (Madrid, Spain)

Ronda de Poniente, N°2, 1st floor,  
Oficina 1B, 28760,  
Tres Cantos, Madrid, Spain  
TEL: +34 911 169178  
info\_eu@newline-interactive.com

### INDIA OFFICE (Chennai)

Room No. 203, No. 37, TTK Road,  
Alwarpet, Chennai,  
Tamil Nadu, India, 600018  
TEL: 1 800 419 0309  
info.in@newline-interactive.com

### KOREA OFFICE (Seoul, South Korea)

A816, 8F, 401 Yangcheon-ro,  
Gangseo-gu, Seoul,  
07528 Korea  
TEL: +82 2 2638 5140  
koreainfo@newline-interactive.com

newline-interactive.com

2019 Newline Interactive Inc. Specification may vary by region, please contact our local offices for details. Actual product features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.