



newline

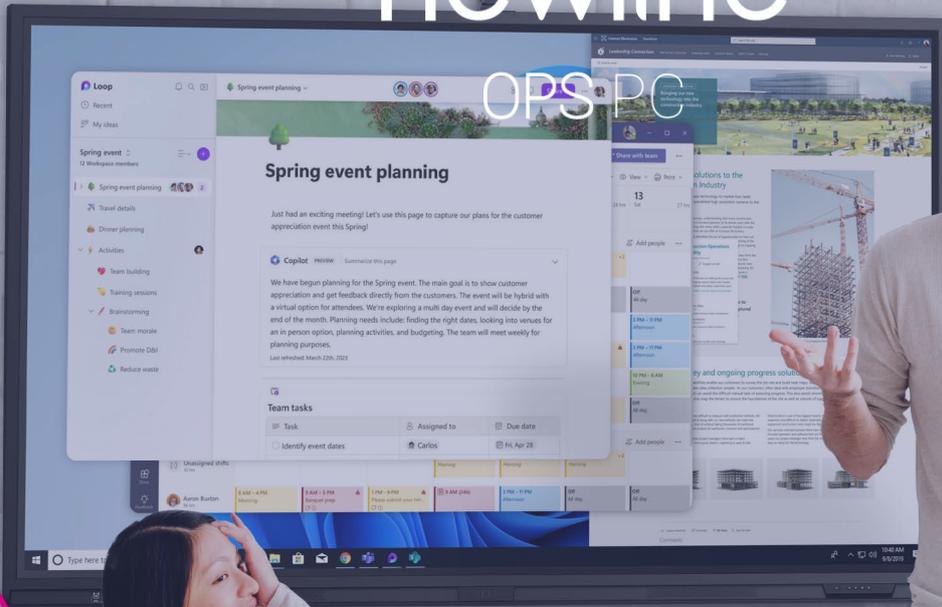

Compatibile
con tutti i monitor
Newline



LA POTENZA DI WINDOWS PERFETTAMENTE INTEGRATA

Newline OPS PC è un computer di bordo per i monitor Newline che si integra perfettamente nello slot OPS sul retro del pannello. Quando si accende il display Newline, si accende automaticamente anche l'OPS PC. Non ci sono cavi visibili e non è necessario collegare altri dispositivi Windows. Newline OPS PC presenta numerose varianti con specifiche diverse. Tutti i modelli sono dotati di OneKey Recovery per ripristinare rapidamente il PC in caso di guasto del sistema. Newline OPS PC è alimentato da Intel e supporta 4K/ UHD a 60 Hz per una qualità d'immagine brillante. Un must assoluto per qualsiasi soluzione Newline!

intel


Processore
Intel

4K
60 hz

Supporta
HDMI 2.0



USB di Tipo C



Memoria RAM in
Dual Channel



OneKey
Recovery



Supporta
TPM 2.0

MODEL

OPS 12th Gen Intel® Core™ i5 + Windows 11 Pro Preinstalled (not activated)	WB5C820W
OPS 12th Gen Intel® Core™ i5 + Windows 11 Pro License with MS Office 2019 Pro	WB5C820U
OPS 12th Gen Intel® Core™ i7 + Windows 11 Pro License with MS Office 2019 Pro	WB7C120U

SMART SYSTEM

	WB5C820W	WB5C820U	WB7C120U
Socket	12th Gen Intel® Core™ i5 - 1240P	12th Gen Intel® Core™ i5 - 1240P	12th Gen Intel® Core™ i7 - 1260P
Performance	12 MB Cache (4,40 GHz)	12 MB Cache (4,40 GHz)	18 MB Cache (4,70 GHz)
Memory	8 GB (2 x 4 GB DDR4)	8 GB (2 x 4 GB DDR4)	16 GB (2 x 8 GB DDR4)
Storage	256 GB SSD	256 GB SSD	256 GB SSD
Graphics	Intel® Iris® Xe	Intel® Iris® Xe	Intel® Iris® Xe
WIFI/BT	Wi-Fi 6 & Bluetooth 5.2	Wi-Fi 6 & Bluetooth 5.2	Wi-Fi 6 & Bluetooth 5.2
LAN	Integrated 10/100/1000 M Adaptation	Integrated 10/100/1000 M Adaptation	Integrated 10/100/1000 M Adaptation
JAE 80 Pin	HDMI 2.0 (4K @60 Hz)	HDMI 2.0 (4K @60 Hz)	HDMI 2.0 (4K @60 Hz)

ELECTRICAL

Audio	Realtek ALC662 HD Audio IC
Working Voltage	DC19 V / 5 A

FRONT I/O

USB-A 3.0	2
USB-A 2.0	2
RJ45 10/100/1000 M	1
HDMI 1.4 out (4K@30 Hz)	1
Jack 3,5 mm Line out	1
Jack 3,5 mm Mic in	1
WIFI/BT ANT	2
Power button	1
Power LED	1
HDD/SSD LED	1
Kensington lock slot	1
USB-C (Thunderbolt 4.0)	2

SPECIAL

RAM Expandable	Up to 32 GB (2 x 16 GB DDR4)
Certificates	CE, RoHS, Reach
TPM	TPM 2.0 firmware

TRANSPORTATION/ STORAGE

Material	Metal
Temperature	Operating 50°C - 450°C Storage 100°C - 500°C
Humidity	5% - 95% (non-condensing)
Dimensions	180 x 119 x 30 mm
Packaging Dimensions	258 x 250 x 77 mm
Net Weight	0,7 Kg
Gross Weight	1 Kg