


# newline


All Stars

LYRA è una piccola costellazione dell'emisfero boreale che ospita la Nebulosa Anello e Vega, una delle stelle più luminose.

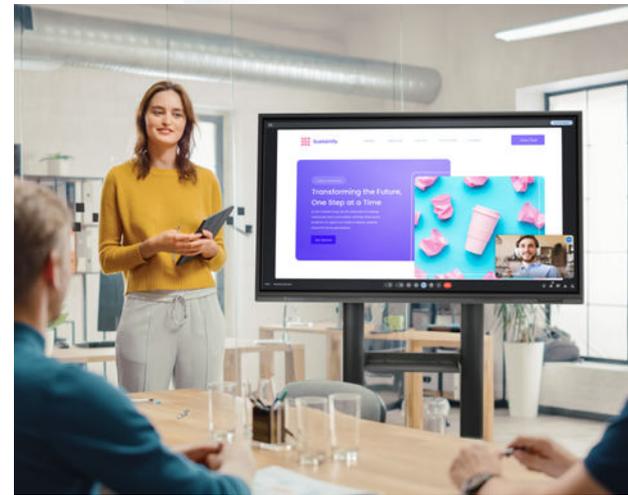

## INNOVAZIONE SICURA

Scoprite Lyra Pro, la nostra soluzione enterprise affidabile. Certificata Google EDLA, si integra perfettamente con le Google Apps e offre una scrittura estremamente precisa grazie alla tecnologia zero bonding. Il display garantisce immagini 4K cristalline con audio integrato. Gli aggiornamenti modulari assicurano massima adattabilità, mentre la piattaforma sicura con Android 13 pone la sicurezza al primo posto. Lyra Pro migliora l'efficienza e la produttività, offrendo una soluzione solida per le esigenze di oggi.

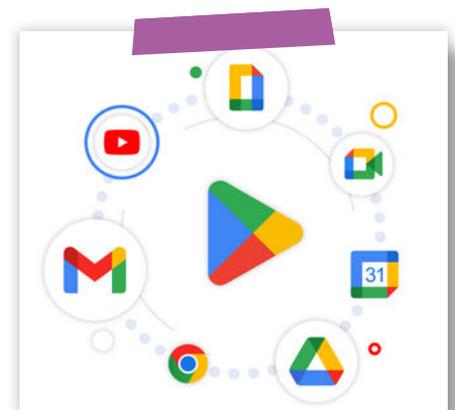

### SISTEMA MODULARE

Elevate l'esperienza con il nostro universo di soluzioni. Personalizzate il vostro monitor con gli accessori Newline. Combinateli tra loro per creare la configurazione migliore.



### L'ECOSISTEMA INTERATTIVO DI NEWLINE

L'Ecosistema Interattivo Newline migliora l'insegnamento con strumenti versatili che si integrano perfettamente con qualsiasi software o dispositivo, soddisfacendo tutte le esigenze della classe.

WHITEBOARD CAST+ ENGAGE DISPLAY MANAGEMENT PLUS  
CLASSROOM TOOLS SIGNAGE PRO



Wi-Fi e Bluetooth potenziati



Alimentazione con cavo USB Type-C (65 W)



Profili Multiutente Sicuri



Ampia Compatibilità



Impianto Audio di Alta Qualità



SDM-S Ready

55"

65"

75"

86"

98"

## MODEL

LYRA Pro 55"	TT-5523QA
LYRA Pro 65"	TT-6523QA
LYRA Pro 75"	TT-7523QA
LYRA Pro 86"	TT-8623QA
LYRA Pro 98"	TT-9823QA

## PANEL

Backlight	Direct LED (Wide Color Gamut + Anti Blue Light)
Glass Surface	Anti-Glare + Anti-Fingerprint + Antimicrobial Tempered Glass
Bonding Technology	Certified Zero Bonding
Display Area	55": 1211 x 682 mm
	65": 1428 x 803 mm
	75": 1650 x 928 mm
	86": 1895 x 1066 mm
	98": 2161 x 1216 mm
Display Ratio	16:9
Resolution	3840 x 2160 (4K)
Colours	1,07 Billion
Brightness	55": 450 cd/m <sup>2</sup>
	65": 450 cd/m <sup>2</sup>
	75": 450 cd/m <sup>2</sup>
	86": 450 cd/m <sup>2</sup>
	98": 450 cd/m <sup>2</sup>
Contrast Ratio	5000:1
Response Time	5 ms
Viewing Angle	178°
Display Life Time	≥ 50 000 hours
Transparency	> 88%
Haze	2 % ~ 5 %
Touch Surface Hardness	7 H

## POWER CONSUMPTION

Standard mode*	55": 95 W
	65": 96 W
	75": 120 W
	86": 128 W
	98": 207 W
Standby mode*	<0,5 W

## TOUCH

Touch Technology	Stellar Touch Technology
Touch Points	50 Windows
	20 Android/MAC/Linux
Touch Screen Writing Tools	Passive pen, Finger, Fist
Number of stylus	2
Accuracy	±1 mm
Real Palm Rejection	✓

## SPEAKER

Speaker Position	Front Facing
Speaker Rated Impedance	6 Ω
Speaker Max. Power Output	20 W x 2

## FRONT I/O

USB Type-C (Powered 65 W)	1
HDMI IN 2.1 with HDCP 2.2	1
USB Type-B (Touch)	1
USB 3.2 Type-A	2
Microphone In	1

## REAR I/O

HDMI IN 2.1 with HDCP 2.2 (4k @60 Hz)	2
DisplayPort 1.2	1
USB Type-B 3.2 (Touch)	3
USB Type-C (Powered 15 W)	1
USB Type-A 3.2	2
USB 3.2 Type-A to Android	1
HDMI OUT 2.0 (4k @60 Hz)	1
RS232	1
RJ45 (Gigabit)	In x 1 / Out x 1
OPS Slot	1
SDM-S Slot	1
SPDIF	1
Audio Line Out (Jack 3,5 mm)	1
Power Out Connect (180 W)	1

## SMART SYSTEM

SoC Chipset	Amlogic A311D2 octa-core processor 4 x Cortex-A73 at 2,2 GHz, 4 x Cortex-A53 at 2,0 GHz
RAM	8 GB DDR4
Total Storage	128 GB (Expandable)
Operating System	Android 13 Certified
Google EDLA	✓
Formats Support For Image	JPG, JPEG, BMP, PNG MPEG1, MPEG2, MPEG4, SorensonH.263, H.263, H.264, MVC, AVS, AVS+, WMV3, VC1, Motion JPEG, VP8, VP9, RV30/ RV40
Formats Support For Video	MPEG1/2ER1; @LAYER2; @LAYER3, EAC3, ACC-LC, HEAAC, VORBIS, LPCM, IMA-ADPCM, MS-ADPCM, G711 A/MU-LAW, LBR (COOK), FLAC
Formats Support For Audio	
Camera Slot	1
Wi-Fi 6 + Bluetooth 5.2 Module	Integrated (Replaceable)

## EXTRA FIRMWARE FEATURES

Multiuser profile	✓
Embedded Google Apps	✓

## DIMENSIONS / WEIGHT

Outline Dimensions* (Excl. wall mount)	55": 1294 x 808 x 101 mm
	65": 1513 x 927 x 118 mm
	75": 1735 x 1051 x 119 mm
	86": 1982 x 1191 x 119 mm
	98": 2258 x 1345 x 122 mm
Net Weight*	55": 31,5 Kg
	65": 39 Kg
	75": 52 Kg
	86": 65 Kg
	98": 108 Kg
VESA*	55": 400 x 400 mm
	65": 600 x 400 mm
	75": 800 x 400 mm
	86": 800 x 400 mm
	98": 800 x 600 mm

\* Le misure fornite sono indicative e soggette a ulteriori aggiustamenti. Non sono ancora considerate definitive