
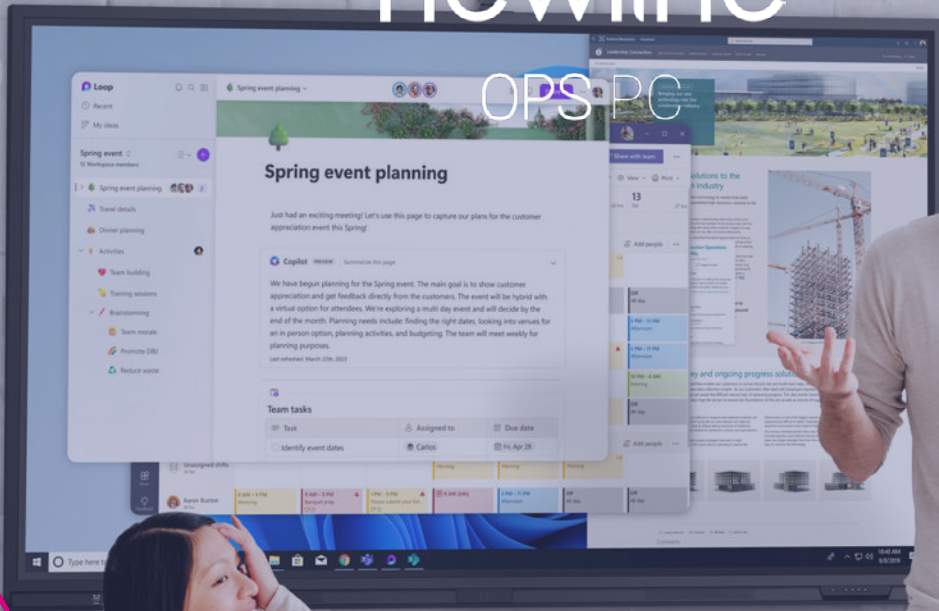


newline

OPS PC



Kompatibel zu
allen Newline
Displays

LEISTUNGSSTARKES WINDOWS NAHTLOS INTEGRIERT



Newline OPS-PC ist ein Bordcomputer für Newline-Displays, der sich nahtlos über den OPS-Slot auf der Rückseite des Panels integrieren lässt. Wenn Sie Ihren Newline-Bildschirm einschalten, wird der OPS-PC automatisch mit eingeschaltet. Keine sichtbaren Kabel, kein Anschluss weiterer Windows-Geräte notwendig. Der Newline OPS-PC ist in einer Reihe von Varianten mit unterschiedlichen Spezifikationen erhältlich. Alle Modelle verfügen über OneKey Recovery zur schnellen Wiederherstellung Ihres PCs im Falle eines Systemausfalls. Newline OPS-PC wird mit Intel Prozessoren betrieben und unterstützt 4K/UHD bei 60 Hz für eine brillante Bildqualität. Ein absolutes Muss für jede Newline-Lösung!

intel


Powered
by Intel

4K
60 hz

Unterstützt
HDMI 2.0



USB
Type-C



Dual Channel
Memory



OneKey
Recovery



Unterstützt
TPM 2.0

MODELL

OPS 14th Gen Intel® Core™ Ultra 5 + Windows 11 Pro Preinstalled (not activated)	WB5E820W
OPS 14th Gen Intel® Core™ Ultra 5 + Windows 11 Pro Preinstalled with Windows Licence + MS Office 2019 (perpetual)	WB5E820U
OPS 14th Gen Intel® Core™ Ultra 7 + Windows 11 Pro Preinstalled with Windows Licence + MS Office 2019 (perpetual)	WB7E120U

SMART SYSTEM

	WB5E820W	WB5E820U	WB7E120U
Socket	14th Gen Intel® Core™ Ultra 5 125H	14th Gen Intel® Core™ Ultra 5 125H	14th Gen Intel® Core™ Ultra 7 155H
Performance	18 MB Cache (4,50 GHz)	18 MB Cache (4,50 GHz)	24 MB Cache (4,80 GHz)
Memory	8 GB (2 x 4 GB DDR4)	8 GB (2 x 4 GB DDR4)	16 GB (2 x 8 GB DDR4)
Storage	256 GB SSD	256 GB SSD	256 GB SSD
Graphics	Intel® Xe LPG Graphics	Intel® Xe LPG Graphics	Intel® Xe LPG Graphics
WIFI/BT	Wi-Fi 6 & Bluetooth 5.3	Wi-Fi 6 & Bluetooth 5.3	Wi-Fi 6 & Bluetooth 5.3
LAN	Integrated 10/100/1000 M Adaptation	Integrated 10/100/1000 M Adaptation	Integrated 10/100/1000 M Adaptation
JAE 80 Pin	HDMI 2.0 (4K @60 Hz)	HDMI 2.0 (4K @60 Hz)	HDMI 2.0 (4K @60 Hz)

ELEKTRISCH

Audio	Realtek ALC5682 Audio DAC
Working Voltage	DC19 V / 5 A

FRONT I/O

USB-A 3.2	2
USB-A 2.0	2
RJ45 10/100/1000 M	1
HDMI 2.0 out (4K@30 Hz)	1
HDMI 2.0 in (4K@60 Hz)	1
Jack 3,5 mm Mic in	1
WIFI/BT ANT	2
Power button	1
Power LED	1
HDD/SSD LED	1
Kensington lock slot	1
USB-C (Thunderbolt 4.0)	1
USB-C (support device mode)	1

REAR I/O (JAE Pin)

HDMI 2.0 out (4K@60 Hz)	1
USB-A 2.0/3.2	1
DP	1

SPECIAL

RAM Expandable	Up to 64 GB (2 x 32 GB DDR4)
Certificates	CE, RoHS, Reach
TPM	TPM 2.0 firmware

TRANSPORT/ MASSE

Material	Metal
Temperature	Operating 0°C - 45°C Storage -20°C - 70°C
Humidity	5% - 95% (non-condensing)
Dimensions	180 x 119 x 30 mm
Packaging Dimensions	258 x 250 x 77 mm
Net Weight	0,7 Kg
Gross Weight	1 Kg