


newline

-  GOOGLE CERTIFIED
-  15+ android
-  CERTIFIED ZERO BONDING
-  HYBRID SOLUTION
-  NFC EASY LOG IN
-  AI POWERED CAMERA

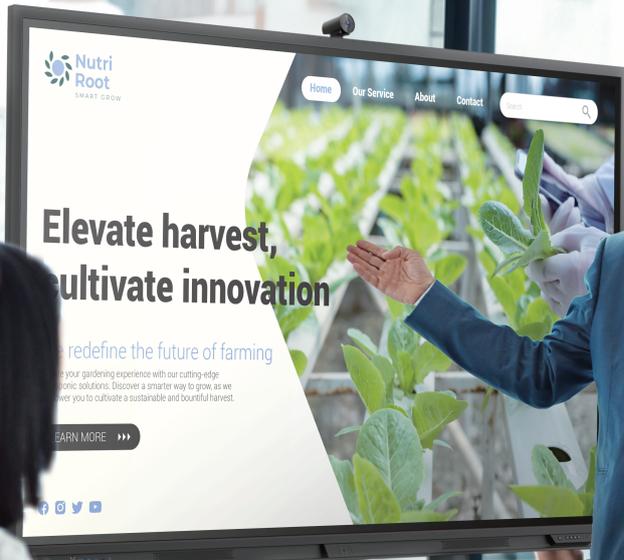

Q+ PRO SERIES

65"

75"

86"

POWER UP YOUR COLLABORATIVE WORKSPACE

Q+ Pro, a Google EDLA certified powerhouse, seamlessly integrated with Google Apps. This flexible solution ensures a superior user experience in any workspace. High-precision writing, immersive sound with a subwoofer, NFC-enabled login and hybrid UC redefine collaboration. Reinvent your workspace, setting a new standard in corporate excellence with Q+ Pro.



Enhanced Wi-Fi & Bluetooth



100 W Powered USB Type-C



Secure Multi User Profiles



Powerful Performance



High Quality Sound incl. Subwoofer



SDM-S Ready



PRODUCT SPECIFICATIONS

Model	TT-6523QCA+	TT-7523QCA+	TT-8623QCA+	
Display	Active Screen Size	65"	75"	86"
	Screen Type	LCD (Direct LED Backlight)		
	Display Area	1428 × 803 mm	1650 × 928 mm	1895 × 1066 mm
	Display Ratio	16:9		
	Resolution	3840 × 2160 (4K)		
	Refresh Rate	60 Hz		
	Colors	1.07Billion		
	After Glass Center Brightness	≥ 400 cd/m ²		
	Typ. Static Contrast Ratio	4000:1 or 1200:1 by OC		
	Typ. Response Time	8ms		
	Viewing Angle	178°		
	Display Life Time (MTBF)	50000 hours		
Smart System	CPU	ARM A76*4 + A55*4		
	GPU	ARM G610 MC4		
	RAM	16GB		
	ROM	256GB		
	SD Card	64GB		
	Android Version	Android 15		
	OS Version	EDLA		
	OPS Slot	Yes		
	SDM-S Slot	Yes		
	WiFi Version	WiFi 5: 2.4G+5G, WiFi 6: 2.4G+5G		
	Bluetooth	BT5.2		
	Built-in Microphone	8-Mic Array, Upper Front		
NFC	Yes			
I/O	Front/Side	1 (PD 100W), 1 × HDMI In, 1 × USB Touch, 2 × USB 3.0, 1 × Mic In		
	Rear	2 × HDMI In, 1 × DP, 1 × Type C (no PD), 1 × Type C Out (no PD), 2 × USB 3.0 Public, 1 × USB 3.0 Android, 3 × USB Touch 3.0, 1 × HDMI Out, 1 × S/PDIF Out, 1 × Line Out, 1 × RS232, 1 × LAN In, 1 × LAN Out		
Speakers	Speaker Position	Bottom Front		
	Speaker Power (Max.)	20W × 2		
	Speaker Power (Avg.)	15W × 2		
	Speaker Rated Impedance	6Ω		
	Speaker Freq. Response	250Hz-20KHz SPL -10dB		
Output S.P.L.	80±3dB			
Subwoofer	Speaker Position	Back Center		
	Speaker Power (Max.)	20W × 1		
	Speaker Power (Avg.)	15W × 1		
	Speaker Rated Impedance	4Ω		
	Speaker Freq. Response	80Hz-2.5KHz SPL -10dB		
Output S.P.L.	77±3dB			
Touch Panel	Glass Surface Treatment	Anti-Glare+Anti-Fingerprint + Antimicrobial Tempered Glass		
	Glass Hardness	9H(Pencil)		
	Glass Thickness	3.2 mm		
	Glass Transparency	88%±3		
	Glass Haze	4-8%		
	Bonding Type	Zero bonding		
	Touch Solution	IR		
	Touch Points	Android 20, Windows 40		
Writing Tool	Stylus or Finger			
Electronic Capacity	Working Voltage	AC100-240V Max. 5.5A / 6.2A / 6.5A		
	Working Power Consumption	≤ 550W	≤ 620W	≤ 650W
	Power Consumption (Standby Mode)	<0.5W		
Transportation & Storage	Storage Temperature&Humidity	-20~60°C, 0~90%RH (non-condensing)		
	Working Temperature/Humidity	0~40°C, 20~80%RH (non-condensing)		
	Installation Method (optional)	wall-mounted / mobile stand		
	Outline Dimension (without wall mount bracket)	1513 × 927 × 119 mm	1735 × 1051 × 122 mm	1982 × 1191 × 119 mm
	Packing Dimension	1640 × 207 × 1036 mm	1859 × 207 × 1160 mm	2119 × 227 × 1290 mm
	VESA Mount Pattern	600 × 400mm	800 × 400mm	
	Net Weight	39 kg	51.5 kg	64.5 kg
Gross Weight	50 kg	65 kg	82.5 kg	

HEADQUARTERS (TX, USA)

TEL: +1 888 233 0868
info@newline-interactive.com

newline

EUROPE OFFICE

TEL: +34 911169178
info_eu@newline-interactive.com

INDIA OFFICE

TEL: 1 800 419 0309
info.in@newline-interactive.com

ASIA PACIFIC OFFICE

TEL: +886 3 550 4768
info_ap@newline-interactive.com

KOREA OFFICE

TEL: +82 2 2638 5140
koreainfo@newline-interactive.com