

newline

XRT ***SERIES***


OUTDOOR DIGITAL SIGNAGE DISPLAY

43"
55"
65"
75"
86"



OUTDOOR VISIBILITY WITHOUT COMPROMISE

The Newline XRT Series brings Newline's trusted performance outdoors with a fully weatherproof, ultra-bright display designed for year-round visibility. Available in sizes from 43" to 86", the XRT Series delivers clear, vibrant content even in direct sunlight - making it ideal for outdoor learning spaces, patios, campuses, storefronts, and public venues.

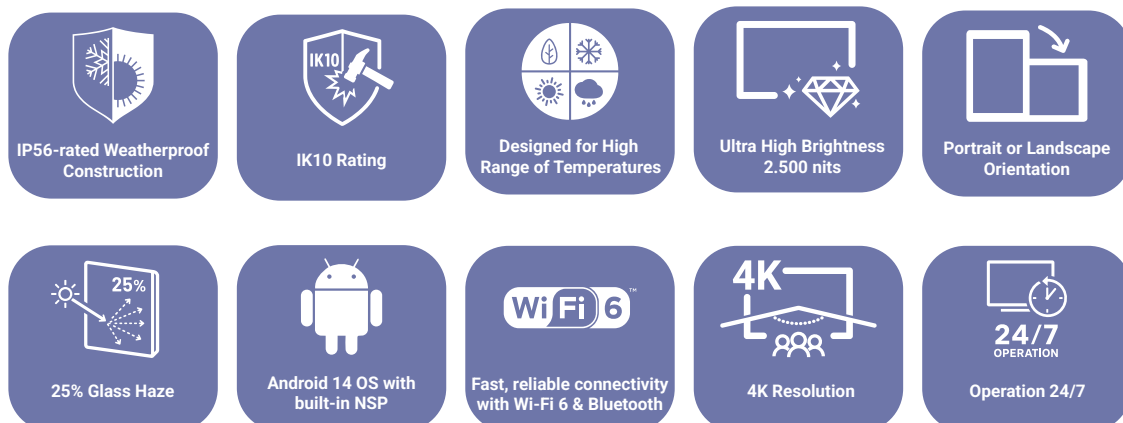

newline

XRT SERIES

Product Specifications

1. MODEL

43"	55"	65"	75"	86"
XRT-4326	XRT-5526	XRT-6526	XRT-7526	XRT-8626

2. PANEL

Screen type	LCD - Direct LED backlight
Display ratio	16:9
Resolution	3840 x 2160 - 4K
Refresh rate	60 Hz
Colors	1.07 billion
Brightness	43": 2,000 nits; Others: 2,500 nits
Contrast	1,200:1
Response time	6.5 ms
Viewing angle	178° / 178°
Lifetime	50,000 hours
OC type	IPS
OC haze	25%
Orientation	Landscape & portrait
IP rating	IP56
Glass hardness	IK10
Glass thickness	5 mm tempered glass
Operation time	24 x 7

3. DISPLAY AREA BY SIZE

43"	55"	65"	75"	86"
941 x 529 mm	1210 x 680 mm	1428 x 804 mm	1650 x 928 mm	1895 x 1066 mm

4. SMART SYSTEM

CPU	Octa Core A72 x 4 + A53 x 4
RAM	4 GB
ROM	32 GB
Android version	Android 14
Wi-Fi version	Wi-Fi 6
Bluetooth	5.2
Wake-on-LAN & Wake-on-WiFi	Yes

5. REAR I/O PORTS

HDMI	2 x HDMI In
Type-C	1 x Type-C - 15 W - full-function Alt
USB-A 3.0	1 x USB 3.0 Android
Line Out - 3.5 mm	1 x Line Out
RS232	2 x RS232C - 1 in + 1 out
LAN In - RJ45	1 x LAN In - 1000M
Speakers	Maximum power 10 W x 2

6. ELECTRICAL PARAMETERS

MODE	43"	55"	65"	75"	86"
Full Load	<219 W	<369 W	<438 W	<591 W	<1500 W
Standby	<0.5 W	<0.5 W	<0.5 W	<0.5 W	<0.5 W

7. DIMENSIONS / WEIGHT

Bezel	35.9 mm
Working temperature & humidity	-30 to 60 °C · 0-90% RH · non-condensing
Installation method - optional	Wall-mount included / Stand

Specification	43"	55"	65"	75"	86"
Outline dimension without wall moun	1014 x 602.2 x 113.5 mm	1282.4 x 753.2 x 113.5 mm	1501.3 x 876.3 x 113.7 mm	1723.5 x 1001.7 x 113.8 mm	1967.8 x 1138.8 x 114.3 mm
	1135 x 735 x 250 mm	1405 x 885 x 250 mm	1625 x 1005 x 250 mm	1865 x 1165 x 250 mm	2115 x 1285 x 250 mm
Packing dimension					
VESA mount pattern	300 x 400 mm	400 x 400 mm	400 x 400 mm	400 x 600 mm	600 x 800 mm
Net weight	33.8 kg	51 kg	66 kg	85.5 kg	119 kg
Gross weight	41 kg	62.5 kg	80 kg	101 kg	137.8 kg

8. ACCESSORIES

Power Cable (UK) x1 - 2.5 m
Power Cable (EU) x1 - 2.5 m
Remote Control R870 RCA x1 + AAA battery
RS232 3.5 mm to DB9 x1 - 3 m
RS232 3.5 mm to RS232 3.5 mm x1 - 3 m
Wall-mount

9. EXTRAS / CERTIFICATION

FCC (EMC: Class A)
UL
Energy Star
ES8.0
FCC ID
HDMI

The provided measures are indicative and subject to further adjustments. They are not yet considered definitive.

newline

newline-interactive.com/eu

Contact us at: info_eu@newline-interactive.com / Support_eu@newline-interactive.com / Technical Support Hotline: +34 91 804 31 79

2026 Newline Interactive Europe S.L. All Rights Reserved. Newline logo is a registered trademark in the United States and other countries around the world. Product specifications may vary by region, please contact our local offices for details. All weights and dimensions are approximate. Actual product features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.