


Wall Mounting Bracket Installation

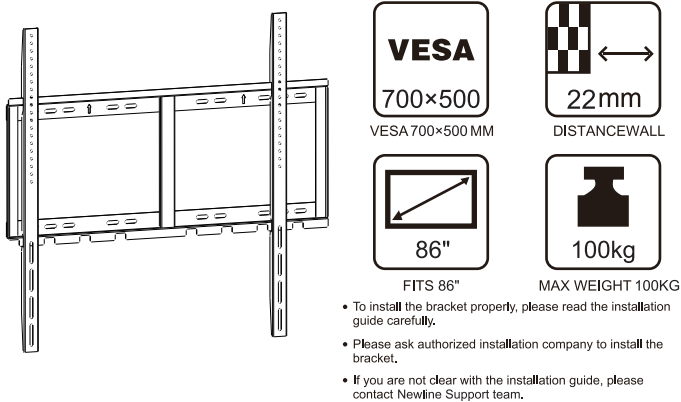

Installation Instructions:


1. When installing the display and this wall mounting bracket, at least two professionals are required to perform all the installation operations. Do not attempt to install without any training, so as to avoid personal injuries caused by misoperations.
2. When installing, the installation position should be specified by professionals, so that its strength can support the gross weight of the display and the bracket for long time. Also, measures should be taken to make sure that the installation position has enough strength to bear outside forces. The hanging points should be stressed on the wall directly. Do not install at positions without enough strength, such as decorative materials or cardboard pasted on the wall.
- In places with few people such as home or hotel rooms, the watching distance is 3 to 5 times the screen diagonal size. The installation height should be appropriate to your viewing angle.
- To prevent accidental damage to the display and personal safety accidents, please avoid to install the bracket at positions that children are easy to touch as possible as you can.
3. The bracket should be installed on vertical surface. Avoid to install on gradient surface or on the top of the room, otherwise the display may fall off and cause personal injuries.
4. If any screws or parts that assembled were loose or lost, switch off and unplug the display, and contact support team to repair.
5. When installing the bracket, avoid places where are within strong electricity or strong magnetic field, avoid positions where are easy to cause noise or vibration, and avoid places where flammable gas is easy to leak.

6. For Anti-glare and better viewing experience, avoid to install the bracket in places where there is direct strong light.
7. To prevent fire, avoid to install the bracket in places with bad conditions, such as heavy smoke, strong wind, moisture or high-temperature heat source.
8. When installing, make sure the metal parts and screws are connected tightly, so as to prevent the screws from loosening to cause the display falling off and personal injuries.
9. Read and understand this installation guide seriously, and follow all the instructions strictly. Our company does not bear responsibility for any damage and loss caused by improper installation and operations.

This mount fits for display size : 86"


Assembly steps:

1. According to the hole size at the back of display, choose 4pcs of M8 screws (attached in package) to fix two brackets at the back of display. Note: please make sure two brackets are on the same height level and centered on the display back. Please also make sure the two brackets are with the correct direction.

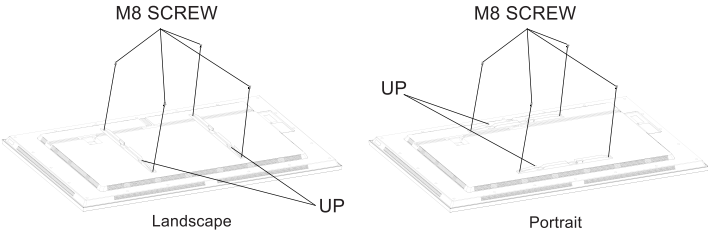

Supports both horizontal and vertical installation.


2. Find the proper position to locate the wall plate on the wall using 8pcs of screws and anchors. If necessary, please drill the holes to ensure the screws are fixed on the wall firmly.
Note: Use a gradienter to adjust the position of the wall plate and make sure it is leveled on the wall.

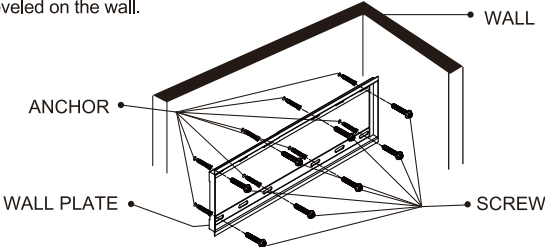

Wall Mounting Bracket Installation Guide




Part list :

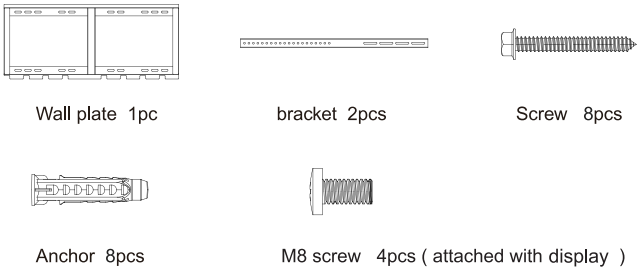

3. Before hanging the display on the wall, please connect the power cable and signal cable at the display end, and do not connect the other end to the power supply (do not install with electricity). Hang the brackets fixed to the display into the wall plate, and then hook the bracket properly as illustrated. Please make sure that the installation is completed before turning on the power.

Note: At least two people are required to transport the display.

- 3.1 Move the bracket hook to the notch or the leftmost end of the wall plate. Then put the display vertically close to the wall to ensure the bracket is tightly attached onto the wall plate.

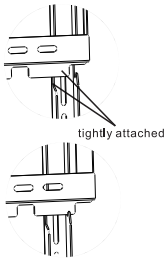

- 3.2 Move the display horizontally to ensure the bracket is hooked to the non-notch or the rightmost end of the wall plate as illustrated.


- 3.3 Flip the bottom of the display to see how much the display tilts up. A small tilt indicates that the bracket hook is fixed properly.




4. If you want to take away the display, please turn off the power first and unplug the power plug. Follow the steps below:

Note: More than 2 people are required to operate at the same time to avoid the damage to the display and the screen, as well as personal safety

- 4.1 Move the bracket hook to the leftmost end of the wall plate.



- 4.2 You can lift the display out of the wall plate.

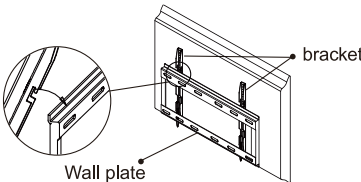

Inserting/unplugging cables:

Method 1: Rotate a certain angle to insert/remove the wire (as shown in Figure 1);

Method 2: Alternatively, remove the screen and then plug/unplug the cable (as shown in Figure 2).

